

NO. A-16771-1

AERATOR PERFORMANCE CURVES


TYPE SUBMERSIBLE AERATOR	MODEL 80TRN412 -52	FREQUENCY 50 Hz
------------------------------------	------------------------------	---------------------------

CUSTOMER'S NAME _____

EQUIPMENT TITLE _____

NO. _____

	STANDARD SPECIFICATIONS	REQUIRED SPECIFICATIONS
AIR INLET BORE	80 mm	mm
AIR QUANTITY	at 6m 157 m ³ /h	m ³ /h
WATER DEPTH	Max. 6 m	m
MOTOR OUTPUT	12 kW	kW
PHASE x VOLTAGE	3 ϕ x V	ϕ x V
CURRENT	A	A
POLES / REVOLUTION	4 P / s. s. 1500 min ⁻¹	P / min ⁻¹
STARTING METHOD	STAR-DELTA	
INSULATION CLASS	F	

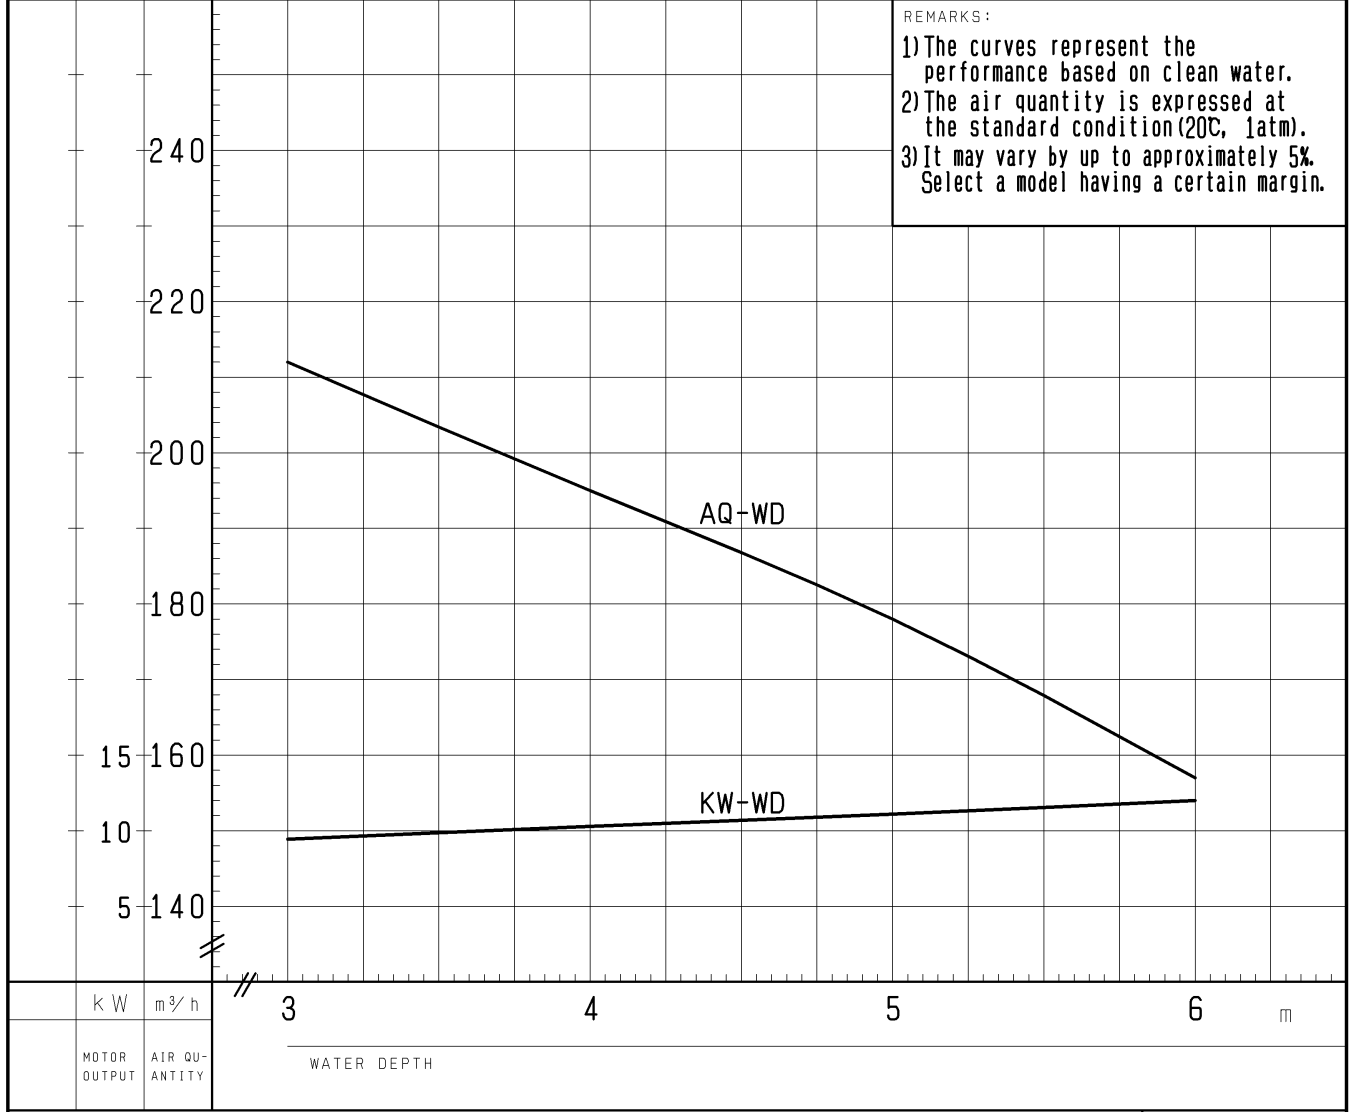

TSURUMI MFG. CO., LTD.

DIMENSION DRAWING		No.	No. A-16779-1
TYPE	SUBMERSIBLE AERATOR	MODEL	80TRN412 -52/62

